



# Automatic Calibration Unit AutoCal

CALIBRATORS

## for automatic calibration of the Mercury Ultratracer UT-3000



### Application


The static **Automatic Calibration Unit** by ENVEA GmbH is used for calibrating the **UT-3000 Mercury Ultratracer** in natural gas monitoring systems of low to intermediate mercury concentrations.

## Operating Principle

The **Mercury Instruments Automatic Calibration Unit** consists of a specially designed mercury vessel containing elemental mercury of high purity, surrounded by an aluminium jacket cooled by a thermoelectric cooler. For automatic calibration a motor driven syringe extracts a defined volume of mercury saturated gas and ifeeds it to the **UT-3000 Ultratracer**.

The UT's microprocessor calculates the mercury concentration from temperature and volume of the calibration gas.

The temperature sensor within the mercury vessel has an accuracy of 0.01 °C.

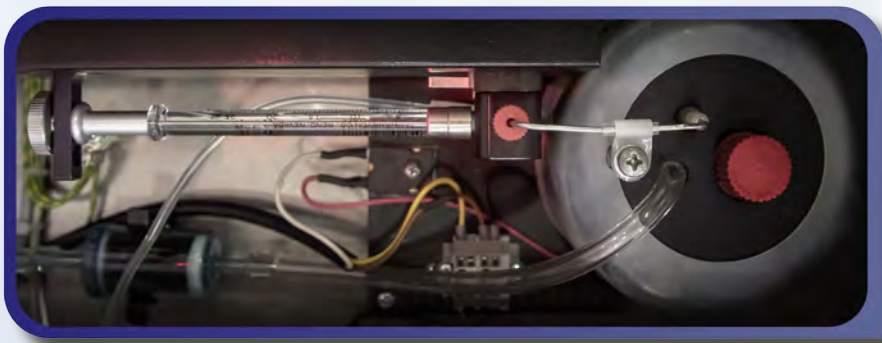

## Technical Specifications MC-3000

Purity of contained Hg	99.999999%
Accuracy of T-Sensor	0.01 °C
Power supply	230 VAC / 50 Hz 110 VAC / 60 Hz
Power consumption	250 VA
Dimensions	45 x 15 x 35 cm (W x H x D)
Weight	approx. 6 kg



As a leading supplier of high precision analytical equipment, we strive at all times to offer top quality solutions. Our products are manufactured according to the ISO 9001 quality regulations.

**ENVEA GmbH**  
Analytical Technologies  
Liebigstraße 5  
D-85757 Karlsfeld  
mail.mi@envea.global  
Tel.: +49(0)8131 - 50 57 20  
Fax.: +49(0)8131 - 50 57 22



ENVEA (Headquarters)  
111 Bd Robespierre / CS 80004  
78304 Poissy CEDEX 4 - FRANCE  
+33(0)1 39 22 38 00  
info@envea.global



Visit us at:  
[www.envea.global](http://www.envea.global)

